

AN ANALYSIS OF FATAL EVENTS IN THE CONSTRUCTION INDUSTRY 2014

**Prepared for: Office of Statistical Analysis
Occupational Safety and Health Administration
U. S. Department of Labor**

**Prepared by: Construction Industry Research and Policy Center
University of Tennessee, Knoxville**

May 4, 2016

This report is based upon OSHA-inspected fatal events in construction during calendar year 2014. The data analyzed were provided by Dave Schmidt, Director, Office of Statistical Analysis, Occupational Safety and Health Administration. John Wagner, M.S., Research Associate III conducted the study and prepared this report. The author thanks Dr. John R. Moore and Thomas E. Cressler II for their critique and suggestions which added measurably to the report. The author is solely responsible for all interpretations, conclusions and any errors found in the report.

Executive Summary

The Occupational Safety and Health Administration (OSHA) inspected 470 fatal construction incidents (excluding non-work related causes), involving 496 fatalities, in calendar year 2014. Seven of the 31 proximal causes classified in this report accounted for 252 (53.6 percent) of the fatal events investigated and 256 (51.6 percent) of the fatalities. They were: (1) “fall from/through roof”: 58 events (12.3 percent); (2) “fall from/with ladder”: 38 events (8.1 percent); (3) “electric shock from equipment installation/tool use”: 37 events (7.9 percent); (4) “fall from/with structure (other than roof)”: 31 events (6.6 percent); (5) “crushed/run-over/trapped of operator of construction equipment”: 30 events (6.4 percent); (6) “crushed/run-over by highway vehicle”: 29 events (6.2 percent); and (7) “fall from/with scaffold”: 29 events (6.2 percent).

A comparison of the year-to-year ranks of the proximal causes during the 1991-2014 period shows that they are highly and significantly correlated, i.e., the individual ranks of the causes vary little from year-to-year.

Most of the fatal events involved a single victim, but 24 (5.1 percent) of the events were multi-fatality events which accounted for an additional 26 (5.2 percent) of the fatalities.

Other findings included:

- **Initiation.** In 314 (66.8 percent) of the fatal events the victim was judged to be the primary initiator of the cause; in 118 events (25.1 percent) the victim was judged to be simply in the wrong place at the wrong time; in 30 events (6.4 percent) another employee was judged to be the primary initiator of the cause; in 2 events (0.4 percent) the victim and another employee were judged to be primary initiator of the cause; and 6 events (1.3 percent) could not be classified.

Four events were the result of safety equipment failure and are included in the wrong place at the wrong time category. Safety and equipment failures are 3.4 percent of wrong place at the wrong time events and .9 percent of all fatal events.

- Task. In 467 of the events (99.4 percent) the victim was judged to be performing work at the task site when injured, in 1 event (0.2 percent) the victim was going to or from work or not working when injured and 2 events (0.4 percent) could not be classified.
- Timing. During the work week the most fatal events happened on Tuesday and Wednesday with 86 events (18.3 percent) each, followed by Monday with 83 events (17.7 percent), Friday with 82 events (17.4 percent), Thursday with 80 events (17.0 percent) and Saturday and Sunday with 53 combined events (11.3 percent). The most fatal events happened between the 11th and 12th hour with 53 events (11.5 percent) followed by fatal events happening between the 10th and 11th hour with 50 events (10.8 percent and between the 9th and 10th hour and the 14th and 15th hour, each with 47 events (10.2 percent). Fatalities were more evenly distributed across normal work hours than they have been in the past.
- A special study examined the causes of fatalities occurring during highway/road construction, undertaken because of its unique exposure to external hazards, vehicular traffic, found that the leading cause of these 48 fatal events was “crushed/run-over by highway vehicle” accounting for 26 events (54.2 percent). The leading contributing causes of these 26 events was “highway vehicle lost control and entered well-identified work zone” with 8 events (30.8 percent), “highway vehicle struck victim (flagger) signaling traffic at the beginning of marked work zone” with 6 events (23.1 percent) and

highway vehicle struck victim by entering inadequately marked and protected work zone” with 4 events (15.4 percent).

Table of Contents

Section		Page #
I.	Introduction	1
II.	Data.....	1
III.	Analysis of Fatal Events by Cause	3
IV.	Analysis by Victim’s Situation.....	12
V.	Analysis of Fatal Events by Day of Week and Time.....	13
VI.	Highway/Road Construction Fatalities.....	16

List of Tables in Text

Table 1.	Construction Fatal Event Causes, 2014.....	4
Table 2.	A Comparison of Ranks of Causes of Fatal Events in 1991 – 2013 with 2014.....	9
Table 3.	Distribution of Fatal Construction Events by Day of Week, 2014.....	14
Table 4.	Distribution of Fatal Construction Events by Hour, 2014.....	15
Table 5.	Frequency of Fatal Event Causes in Highway/Road Construction, 2014.....	16
Table 6.	Construction Fatalities Caused by “Crushed/Run-Over by Highway Vehicle” by Time of Day, 2014.....	19
Table 7.	Frequency of Sub-Categories of “Crushed/Run-Over by Highway Vehicle”, 2014.....	20

List of Figures in Text

Figure 1.	Fatal Events per 100,000 Construction Establishment Employees (1991-2014)	11
Figure 2.	Highway Construction Fatality Cause Comparison (2014).....	17

Appendices

Appendix A:	Definitions of Fatal Event Causes	23
Appendix B:	Figure B1. Comparison of Construction Fatal Events (1995-2013 with 2014).....	26
	Figure B2. Comparison of Construction Fatal Events (2014)	27
	Figure B3. Comparison of Construction Fatal Events (1995–2013)	28
	Figure B4. Comparison of Grouped Construction Fatal Events (1995-2013 with 2014).....	29

Appendix C:	Table C1. Construction Fatal Events by End-Use Type, 2014	31
	Table C2. Construction Fatal Events by Type of Project, 2014.....	31
	Table C3. Construction Fatal Events by Six-Digit NAICS, 2014.....	32
	Table C4. Construction Fatal Events by Project Value, 2014.....	33
	Table C5. Construction Fatal Events by Construction Operation, 2014.....	34

I. Introduction

This report focuses on the direct causes of fatal events that occurred in the calendar year 2014 in the construction industry. Twenty-one earlier studies¹ by the Construction Industry Research and Policy Center (CIRPC) analyzed the causes of fatal events in this industry in 1991-1992, 1993-1994 and for each of the years 1995 through 2013.

II. Data

The data analyzed in this report, provided by OSHA, consist of fatality case file narratives and coded data of the 470 fatal events inspected by OSHA which accounted for 496 fatalities in construction during calendar year 2014. In this report, as in earlier reports, analysis includes all OSHA-inspected fatal construction events under both Federal and State jurisdiction. The Occupational Safety and Health Act of 1970 provide States with the option of administrating the Act themselves or accepting Federal administration of the Act. Twenty-eight States, District of Columbia, and the Virgin Islands chose administration under the Federal System, and the remaining twenty-two States and one Territory chose self-administration under State Plans².

¹ An Analysis of Fatal Events in the Construction Industry, 1991-1992 (1993), An Analysis of Fatal Events in the Construction Industry, 1993-1994 (1995), An Analysis of Fatal Events in the Construction Industry, 1995 (1996), An Analysis of Fatal Events in the Construction Industry, 1996 (1997), An Analysis of Fatal Events in the Construction Industry, 1997 (1999), An Analysis of Fatal Events in the Construction Industry, 1998 (2000), An Analysis of Fatal Events in the Construction Industry, 1999 (2001), An Analysis of Fatal Events in the Construction Industry, 2000 (2002), An Analysis of Fatal Events in the Construction Industry, 2001 (2003), An Analysis of Fatal Events in the Construction Industry, 2002 (2004), An Analysis of Fatal Events in the Construction Industry, 2003 (2005), An Analysis of Fatal Events in the Construction Industry, 2004 (2006), An Analysis of Fatal Events in the Construction Industry, 2005 (2007), An Analysis of Fatal Events in the Construction Industry, 2006 (2008), An Analysis of Fatal Events in the Construction Industry, 2007 (2009), An Analysis of Fatal Events in the Construction Industry, 2008 (2010), An Analysis of Fatal Events in the Construction Industry, 2009 (2011), An Analysis of Fatal Events in the Construction Industry, 2010 (2012), An Analysis of Fatal Events in the Construction Industry, 2011 (2013), An Analysis of Fatal Events in the Construction Industry, 2012 (2014) and An Analysis of Fatal Events in the Construction Industry, 2013 (2015). Construction Industry Research and Policy Center, University of Tennessee, Knoxville.

² States in the Federal System are: AL, AR, CO, CT, DE, DC, FL, GA, ID, IL, KS, LA, MA, MS, MO, MT, NE, NH, NJ, NY, ND, OH, OK, PA, RI, SD, TX, VI, WV and WI. States and Territories under State Plans are: AK, AZ, CA, HI, IN, IA, KY, MD, ME, MI, MN, NV, NM, NC, OR, PR, SC, TN, UT, VT, VA, WA and WY.

As in the earlier studies, the analysis excluded non-accidental fatalities on construction sites or contractor yards (such as deaths from non-work related heart attacks, strokes, seizures, etc.) as well as fatalities of construction workers killed off-site in traffic accidents; in 1991-2013 these fatalities accounted for about 4.3 percent of OSHA-inspected fatal construction events but about 8.0 percent in 2014. Although the Occupational Safety and Health Act of 1970 requires employers to report fatalities to OSHA within eight hours of the occurrence of the event, not all fatalities on construction sites are inspected by OSHA; for example, OSHA does not inspect fatal construction events involving independent contractors with no employees. Therefore, the results reported here do not provide a year-to-year analysis of changes in the absolute number of fatal events or individuals killed on construction sites.

Each narrative record typically consists of a brief description of the event leading to the fatality. The narratives were analyzed and classified into one of 31 cause categories, using the collective judgment of the investigators. However, where the narrative description was omitted, inconclusive, or completely unclear; the event cause was coded “unknown cause or other”.

CIRPC’s review of over 1200 case files of fatal construction events occurring in 1997, 1998 and 1999 revealed that coded data for an event sometimes did not comport with corresponding narrative descriptions and the narrative descriptions were sometimes internally inconsistent. Later reviews of fatality files for other special studies lead us to believe these inconsistencies continue although at a lower rate. Also, the narratives of fatal events in the OSHA data base, OSHA Information System (OIS), seem to be less descriptive than those in the previous Integrated Management Information System (IMIS) data base. Consequently, the data analyzed in this report are restricted to the direct causes of the fatal events where the authors were able, in most cases, to classify the events with relative certainty according to 31 types of causes. Essentially the same causes as were used in CIRPC’s previous fatality studies. For those

who are interested, the original coded data from the files are included in Appendix C for the following classifications: (1) end-use of structure; (2) type of project; (3) victim by contractor type(s); (4) contract value of the construction project; and (5) construction operation associated with the fatality.

In classifying the events a rule of primacy was followed for multiple-cause fatalities the first cause in the chain of causes was recorded as the cause of the fatal event. Definitions of the causes are shown in Appendix A.

III. Analysis of Fatal Events by Cause

Table 1 shows the cause classification system, the number of times each cause represented a fatal event in 2014, the relative frequency of each cause and the number of victims killed.³ It can be seen that “fall from/through roof” led all other causes in number of fatal events (58 or 12.3 percent of total events), followed by “fall from/with ladder” (38 or 8.1 percent of total events). The third leading cause was “electric shock from equipment installation/tool use” (37 or 7.9 percent of total events); the fourth leading cause was “fall from/with structure (other than roof) ” (31 or 6.6 percent of total events); the fifth leading cause was “crushed/run-over/trapped of operator by operating construction equipment” (30 or 6.4 percent of total events); and the sixth and seventh leading causes “fall from/with scaffold” and “crushed/run-over by highway vehicle” (each with 29 or 6.2 percent of total events). These seven event causes account for a majority of events (252 or 53.6 percent of total events). The number and relative frequencies of the remaining causes of the 470 fatal events analyzed may be read directly from Table 1. (Comparative and aggregated frequencies for earlier years are shown in Figures B1 through B4 in Appendix B.)

³ Each event included at least one person killed and in several events additional workers were killed or injured.

Table 1. Construction Fatal Event Causes, 2014

Event Causes	Description	Number of Events and Victims		Percent of Events
		Events	Victims	
1.	asphyxiation/inhalation of toxic vapor	10	14	2.1
2.	caught in/struck by stationary equipment	2	2	0.4
3.	crushed from collapse of structure	13	13	2.8
4.	crushed/run-over of non-operator by operating construction equipment	23	23	4.9
5.	crushed/run-over/trapped of operator by operating construction equipment	30	30	6.4
6.	crushed/run-over by construction equipment during maintenance/modification	14	14	3.0
7.	crushed/run-over by highway vehicle/non-construction equipment	29	31	6.2
8.	drown, non-lethal fall	3	3	0.6
9.	electric shock by touching exposed wire	10	10	2.1
10.	electric shock by equipment contacting power source	17	23	3.6
		<u>Event</u>	<u>Percent</u>	
a.	ladder	1	0.2	
b.	scaffold	4	0.8	
c.	crane/lifting equipment/boom/dump truck	10	2.1	
d.	contact while handling materials such as gutters, iron rods, etc.	2	0.4	
11.	electric shock from equipment installation/tool use	37	37	7.9
12.	electric shock, other	0	0	0.0
13.	elevator (struck/crushed by elevator or counter weights)	4	4	0.8
14.	fall from/with ladder: includes collapse/fall of ladder	38	38	8.1
15.	fall from/through roof	58	58	12.3
		<u>Event</u>	<u>Percent</u>	
a.	fall off of roof	38	8.1	
b.	fall through roof other than skylight	2	0.4	
c.	fall through skylight or other opening	18	3.8	
16.	fall from highway vehicle/construction equipment	3	3	0.6
17.	fall from/with scaffold	29	29	6.2
18.	fall from/with bucket (aerial lift/basket)	17	22	3.6
19.	fall from/with structure (other than roof)	31	33	6.6
		<u>Event</u>	<u>Percent</u>	
a.	fall with collapse of structure	13	2.8	
20.	fall from/with platform or catwalk	6	7	1.3
21.	fall through opening (other than roof)	11	11	2.3

Table 1. Construction Fatal Event Causes, 2014 (continued)

<u>Event Causes</u>	<u>Description</u>	<u>Number of Events and Victims</u>		<u>Percent of Events</u>
		<u>Events</u>	<u>Victims</u>	
22.	fall, other or unknown	6	6	1.3
23.	fire/explosion/scalding	3	3	0.6
24.	hyperthermia/hypothermia	3	3	0.6
25.	hit, crushed, fall during lifting operations	23	26	4.9
26.	struck by falling object/projectile (including tip-over)	17	17	3.6
27.	crushed/suffocation from trench collapse	11	12	2.3
28.	crushed while unloading-loading equipment/material (except by crane)	14	15	3.0
29.	shock/burn from lightning	2	2	0.4
30.	crushed other	0	0	0.0
31.	unknown cause or other	6	7	1.3
		<u>Event</u>	<u>Percent</u>	
a.	Other	5	1.1	
Total		470	496	100.0

At the risk of misleading the reader by over-generalizing, it may be informative to describe examples of frequently occurring specific situations leading to the seven most frequent causes of fatal events as listed in Table 1.

Fall from/through Roof. An inattentive roofer or laborer without fall protection walks backward and off the roof or steps into a skylight opening or onto a covered skylight opening.

Fall from/with Ladder. Worker falls from or with a ladder because he/she overreaches or fails to secure the ladder or missteps or slips or simply loses balance.

Electric shock from equipment installation/tool use. An electrician working with live wires is electrocuted while replacing a light fixture or while trouble-shooting a HVAC unit.

Fall from/with Structure. An ironworker without fall protection slips or loses balance while erecting steel frame and falls or a carpenter or an ironworker falls as a result of a collapsing structure or structural component.

Crushed/Run-over...Operator. Mobile construction equipment, such as a dozer or fork lift, goes over an embankment and rolls over or turns over when encountering uneven terrain, resulting in the crushing of the operator. (The operator may be crushed inside the equipment or crushed by the equipment while trying to escape.)

Crushed/Run-over by highway vehicle. A worker working in a work zone is struck by an out-of-control vehicle.

Fall from/with scaffold. A worker slips/trips and falls from a scaffold; a worker overloads a scaffold causing the scaffold to collapse with him on it; a worker assembling/dis-assembling a scaffold falls from the scaffold.

The number of victims killed by each cause is also shown in Table 1 where it can be seen that in most events only one worker was killed per event. There were 21 fatality causes where no event had multiple fatalities; 10 fatality causes included events with multiple fatalities. The fatality cause with the most victims per event was “asphyxiation/inhalation of toxic vapor” with 10 events and 14 victims or 1.4 victims per event and the largest loss in a single event was 3. Multiple fatality events averaged 2.1 fatalities per event. A single event, “electrical shock by

equipment (scaffold) contacting a power source” resulted in three fatalities. Another single event, “asphyxiation/ inhalation of toxic vapor” also resulted in three fatalities.

Most events involve a single fatality; however a few events involve multiple fatalities and these events most often occur in a few of the event causes. In the prior 10 years, 2004-2013, multiple fatalities in a single event of an event cause occurred in nine of the 10 years for “fire/explosion/scalding”; eight of the 10 years for “crushed/suffocation from trench collapse; seven of the 10 years for both “asphyxiation/inhalation of toxic vapor” and “crushed/run-over by highway vehicle/non-construction equipment”; and six of the 10 years for “fall from/with structure (other than roof)”. The second or even the third fatality in an asphyxiation event is often someone attempting a rescue of worker.

The data for construction fatalities in 2014 showed that 24 of the fatal events (5.1 percent) involved multiple fatalities. The multiple-fatality events averaged 2.0 fatalities per event and accounted for an additional 26 fatalities (5.2 percent) and a total of 50 fatalities (10.1 percent) of the 496 individuals killed in 2014.

These results parallel those reported by the Bureau of Labor Statistics (BLS). During 1995-1999, 4 percent of all fatal work-related events involved multiple fatalities, and these multiple-fatality events accounted for 10 percent of the workers killed during the period. They averaged three fatalities per incident.⁴ It should be noted that the BLS data included homicides, and they accounted for 19 percent of their multi-fatality incidents. There was one homicide in the 2014 OSHA data. Homicides are excluded from the analysis as they have been in prior years.

Table 2 compares the ranks of the causes in 2014 with the average rank of the causes of fatal events during the period 1991-2013. It can be seen that the overall rank pattern of the causes

⁴ Drudi, Dino and Mark Zak,” Work-Related Multi-Fatality Incidents,” Monthly Labor Review, Vol. 127, No. 10, October 2004.

in 2014 is very similar to the rank pattern in 1991-2013. An overall statistical comparison of the correlation of the rank in 2014 with the average rank in 1991-2013 was calculated using a Spearman rank correlation procedure.⁵ The correlation obtained was + 0.91, $p < 0.001$, indicating that the ranks of the causes in the two time periods are highly and positively correlated, i.e., did not change significantly between 1991-2013 and 2014⁶. The Spearman rank-order correlation between 2013 and 2014 causes was calculated and found to be + 0.88, $p < 0.001$, indicating also that the pattern changed very little between 2013 and 2014.

The correlation result is not surprising given that the general composition of construction output, and therefore the mix of construction operations required to produce the output, was probably very similar during the time periods examined. This interpretation implies that the rank of a cause is a function of the magnitude of exposure to the cause and/or the inherent danger associated with the cause.

Falls continues to be the leading fatality cause. Falls represent 42.3 percent of 2014 construction fatal events and 37.2 percent for the 1991-2013 period of construction fatal events. Crushed/run-over by construction equipment and highway vehicles is a major cause of construction fatalities that bears watching. These fatal events were 20.2 (2009), 20.6 (2010), 22.4 (2011), 20.6 (2012), and 21.4 (2013) percent of fatal construction events and for the 1991-2012 period 19.3 percent.

⁵ Sidney Siegel, Nonparametric Statistics for the Behavioral Sciences (New York: McGraw-Hill Book Co., Inc., 1956), p. 219.

⁶Five of the 719 fatal events in 2002 and 17 of 719 fatal events in 2001 had either no narrative or a narrative too incomplete to classify the cause of fatality. These records were coded as “unknown” cause; this was not done in prior years. They were omitted from the calculation of the Spearman Rank correlation in order to avoid data distortion.

Table 2. A Comparison of Ranks of Causes of Fatal Events in 1991 - 2013 with 2014


<u>Event</u>	<u>1991 - 2013 Average</u>			<u>2014</u>		
	<u>Number</u>	<u>Percent</u>	<u>Rank</u>	<u>Number</u>	<u>Percent</u>	<u>Rank</u>
1. asphyxiation/inhalation of toxic vapor	8.0	1.3	22	10	2.1	18
2. caught in/struck by stationary equipment	5.4	0.9	25	2	0.4	28
3. crushed from collapse of structure	24.7	4.0	12	13	2.8	15
4. crushed/run-over of non-operator by operating construction equipment	46.5	7.5	3	23	4.9	8
5. crushed/run-over/trapped of operator by operating construction equipment	34.0	5.5	5	30	6.4	5
6. crushed/run-over by construction equipment during maintenance/modification	12.3	2.0	20	14	3.0	13
7. crushed/run-over by highway vehicle	25.0	4.0	11	29	6.2	6
8. drown, non-lethal fall	5.2	0.9	25	3	0.6	25
9. electric shock by touching exposed wire	19.0	3.1	14	10	2.1	18
10. electric shock by equipment contacting power source	37.2	6.0	4	17	3.6	11
11. electric shock from equipment installation/tool use	31.8	5.1	6	37	7.9	3
12. electric shock, other	3.2	0.6	28	0	0	29
13. elevator (struck/crushed by elevator or counter weights)	2.4	0.5	29	4	0.8	23
14. fall from/with ladder: includes collapse/fall of ladder	28.0	4.6	8	38	8.1	2
15. fall from/through roof	72.5	11.7	1	58	12.3	1
16. fall from highway vehicle/construction equipment	4.4	0.8	27	3	0.6	25
17. fall from/with scaffold	23.0	3.8	13	29	6.2	6
18. fall from/with bucket (aerial lift/basket)	13.3	2.2	16	17	3.6	11
19. fall from/with structure (other than roof)	51.7	8.4	2	31	6.6	4

Table 2. A Comparison of Ranks of Causes of Fatal Events in 1991 - 2013 with 2014 (continued)

<u>Event</u>	<u>1991 – 2013 Average</u>			<u>2014</u>		
	<u>Number</u>	<u>Percent</u>	<u>Rank</u>	<u>Number</u>	<u>Percent</u>	<u>Rank</u>
20. fall from/with platform or catwalk	12.9	2.3	18	6	1.3	21
21. fall through opening (other than roof)	15.5	2.6	15	11	2.3	16
22. fall, other or unknown	4.9	0.9	24	6	1.3	21
23. fire/explosion/scalding	12.1	2.1	19	3	0.6	25
24. hyperthermia/hypothermia	5.7	1.1	23	3	0.6	25
25. hit, crushed, fall during lifting operations	30.8	5.1	7	23	4.9	8
26. struck by falling object/projectile (including tip-over)	27.1	4.4	9	17	3.6	11
27. crushed/suffocation from trench collapse	26.9	4.5	10	11	2.3	16
28. crushed while unloading-loading equipment/material (except by crane)	11.4	2.0	20	14	3.0	13
29. shock/burn from lightning, other	12.6	2.3	16	8	1.7	20
Total	607.7	100.0		470	100.0	

The number of OSHA-inspected fatal construction events has varied over the years since 1991 as has employment in construction establishments.⁷ The trend of these fatal events per 100,000 construction establishment employees is shown in Figure 1.

Figure 1. Fatal Events per 100,000 Construction Establishment Employees (1991-2014)

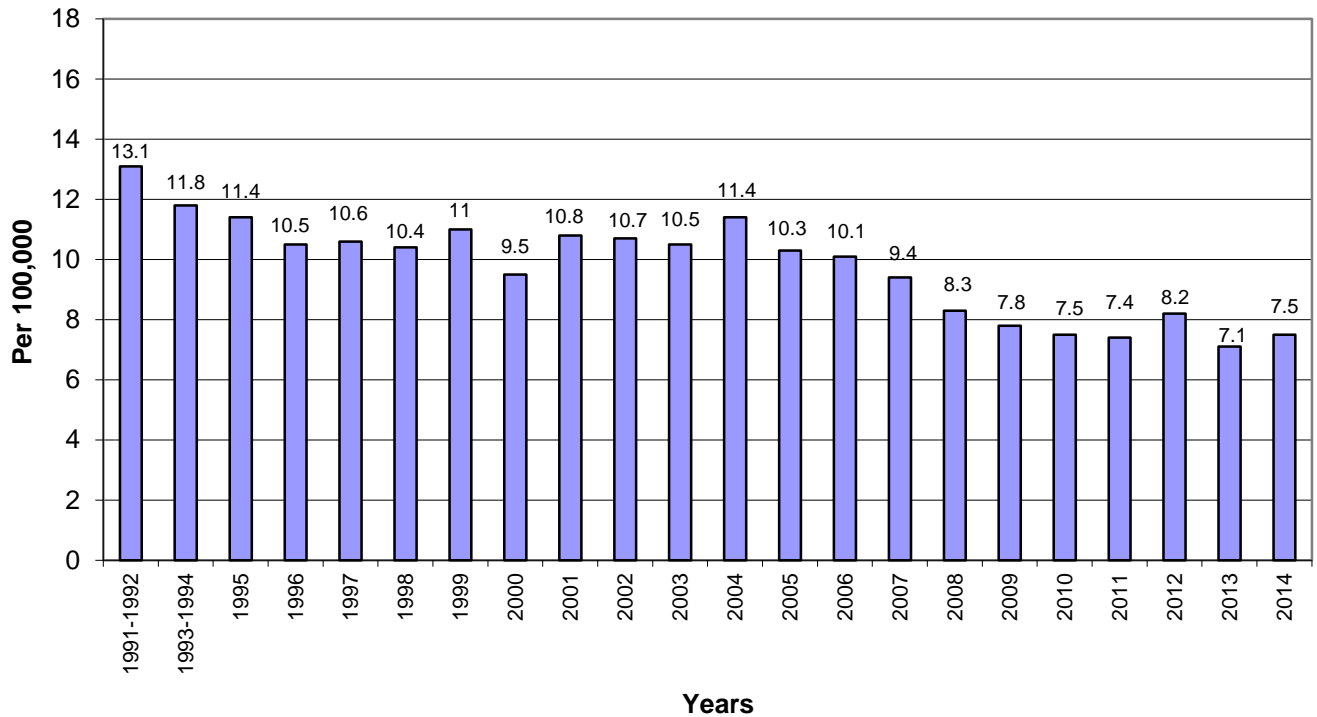

The number of fatal events per 100,000 construction establishment employees had been declining for seven years before increasing to 8.2 in 2012, about the same as 2008. The number of fatal events per 100,000 construction establishment employees decreased from 8.2 in 2012 to 7.1 in 2013 then increased to 7.5 in 2014. The previous trend of declining fatalities per 100,000 construction employees may have ended.

⁷ Bureau of Labor Statistics, National Employment, Hours, and Earnings, CES, Table B-1 www.bls.gov/ces/cesbtabs.htm

IV. Analysis by Victim's Situation

Fatal events were analyzed to determine the role of the 'victim' in each event. The analysis classified the role of the victim by four general categories: (1) victim(s) was the primary, immediate contributor to the event; (2) a combination of victim(s) and another employee was (were) the primary (3) person(s) other than victim(s) was (were) the primary, immediate contributor to the event; (4) no individual directly contributed to the event, i.e., the victim(s) was at the wrong place at the wrong time; and (5) unknown.

The first category includes, for example, most falls, crushed/run-over of operators, electrocutions other than those occurring during lifting operations, asphyxiations and hypothermia. The second and third categories includes, for example, most crushed/run-over of non-operators, lifting operations, loading/unloading of equipment/materials, struck by highway vehicles, fall from/with aerial lift, and electrocutions from crane boom/tackle contacting overhead power lines. The fourth category includes, for example, most structure and trench collapses, struck by projectile/falling objects, and lightning.

It should be understood that these classifications do not indicate fault or preventability of the fatality. For example, while falls are generally classified as "victim was the primary contributor to the event", many fall fatalities would have been prevented with compliance with OSHA's fall protection standards. Similarly, trench collapses classified as "being in the wrong place at the wrong time" are preventable with compliance with OSHA's trenching standard.

Although the classifications were often subjective due to a lack of precise information or conflicting information, following are the results for the 470 events: (1) victim primary initiator of event: 314 events (66.8 percent); (2) victim and another employee primary initiator: 2 events (0.4 percent); (3) person other than victim primary initiator: 30 events (6.4 percent); (4) wrong place at wrong time: 118 events (25.1 percent); and (5) unknown: 6 events (1.3 percent).

Four events were the result of safety equipment failure and are included in the ‘wrong place at the wrong time’ category. Safety equipment failures represent 3.4 percent of ‘wrong place at the wrong time’ events and 0.9 percent of all fatal events.

Over the last ten years, the victim was the primary initiator of the event for 59.2% of the events. The victim being in the “Wrong place at the wrong time” averaged 29.3% of the events, followed by another person with 10.6%, and combination of victim and another person with 0.9%. These ten year totals are very similar to the 2014 numbers.

An additional classification of the 470 fatal events was also analyzed to estimate the distribution of events by work status of the victim. As with the previously discussed classification of who initiated the event, the work status classifications were also subjective. Nevertheless, it may be useful in understanding, in a general sense, the situations in which construction fatalities occur. It was found that: 467 (99.4 percent) of the fatal events involved workers performing work at their task site and 3 (0.6 percent) of the events involved workers going to or from work or not working.

Historically, “working task” ranged from a high of 99.1% for 2012 to a low of 81.1% in 2004. The 2014 data would be a new high for this range. The range for “Going to and from work” or “Not working” is 18.9% in 2004 to 0.9% in 2012. This category has not been above 5% since 2005.

The first category includes, for example, many roofing fatalities, fatalities resulting from structure and trench collapses, events involving crushed/run-over of operators, electrocutions while installing electrical equipment, workers caught in stationary equipment, workers falling from/with aerial lifts and scaffolds and workers climbing/relocating on structures.

V. Analysis of Fatal Events by Day of Week and Time

The fatality data reported from the narratives includes the date and time of day of most fatal events. Table 3 shows the distribution of fatal events by day of the week. The largest number of fatalities occurred on Tuesday and Wednesday with 86 events (18.3 percent) each. Monday had the

third largest number of events, 83 (17.7 percent) followed by Friday with 82 events (17.4 percent), and Thursday with 80 events (17.0 percent). This year the fatal events are approximately equally distributed across the normal five day work week. Note, however, that without knowing the total number of construction hours worked each day, it is not possible to be certain that any one day is more or less hazardous than another.

Table 3. Distribution of Fatal Construction Events by Day of Week, 2014

<u>Day</u>	<u>Number of Events</u>	<u>Percent</u>
Monday	83	17.7
Tuesday	86	18.3
Wednesday	86	18.3
Thursday	80	17.0
Friday	82	17.4
Saturday	32	6.8
Sunday	21	4.5
Total	470	100.0

Table 4 shows the distribution of fatal events by hour (military) of the day. The following percentages represent recorded event times. Event times were missing for 4.6 percent of 2013 events and 1.9 percent of 2014 events. We assume the events with missing time were similarly distributed.

It can be seen that the 11-12 hour period contained the most fatal events, 53 (11.5 percent). As pointed out previously, without knowing the total hours worked in construction each hour, it is not possible to calculate hourly event rates. However, it may be reasonably assumed that the total construction hours worked each hour during the 8-12 hour period and the 13-17 hour period are approximately equal. If so, the results showing that 180 (39.0 percent) of the fatal events occurred in the 8-12 hour period and 153 (33.2 percent) occurred in the 13-17 hour period is a little surprising. In a majority of the prior years, 2004-2013 the number of fatal events has been approximately equal for each four hour period.

Nearly three-fourths (72.2 percent) of the fatal events occurred during 8-12 hour period and the 13-17 hour period. From 2004 through 2014 the percent of fatal events occurring during these eight hours has ranged from 72.2 to 78.7 percent with a median of 74.8 percent.

Table 4. Distribution of Fatal Construction Events by Hour, 2014

<u>Hour</u>	<u>Number of Events</u>	<u>Recorded Time Events Percent</u>	<u>All Events Percent</u>	<u>Events with recorded Times Percent</u>
0-1	4	0.9	0.9	0.9
1-2	5	1.1	1.1	1.9
2-3	8	1.7	1.7	3.6
3-4	3	0.7	0.6	4.3
4-5	2	0.4	0.4	4.7
5-6	4	0.9	0.9	5.5
6-7	3	0.7	0.6	6.2
7-8	16	3.5	3.4	9.6
8-9	30	6.5	6.4	16.0
9-10	47	10.2	10.0	26.0
10-11	50	10.8	10.6	36.6
11-12	53	11.5	11.3	47.9
12-13	41	8.9	8.7	56.6
13-14	41	8.9	8.7	65.3
14-15	47	10.2	10.0	75.3
15-16	38	8.2	8.1	83.4
16-17	27	5.9	5.7	89.1
17-18	16	3.5	3.4	92.6
18-19	7	1.5	1.5	94.0
19-20	7	1.5	1.5	95.5
20-21	3	0.7	0.6	96.2
21-22	1	0.2	0.2	96.4
22-23	3	0.7	0.6	97.0
23-24	5	1.1	1.1	98.1
Unknown	9		1.9	
Total	470	100.0	100.0	100.0

VI. Highway/Road Construction Fatalities

One might think that highway/road construction would be relatively safe, since most work activity at these sites occurs at or near ground level. Falls from elevations, the leading direct cause

of construction fatalities, would have a low potential. However, in 2014, 48 workers were killed in 48 events while working on highway/road projects (10.2 percent of the total fatal events). On-site operating construction equipment was involved in 17 fatal events (3.6 percent).

Table 5 ranks the direct causes of the fatal events by their frequency. The table shows that the leading causes were “crushed/run-over by highway vehicle” 26 events (54.2 percent), followed by “crushed/run-over of non-operator by operating construction equipment” 8 events (16.7 percent) and “crushed/run-over of operator by operating construction equipment” 8 events (16.7 percent) and “electric shock by touching exposed wire with crane/lifting equipment/boom/dump truck” 2 events (4.2 percent). Other event causes are shown in Table 5.


Table 5. Frequency of Fatal Causes in Highway/Road Construction, 2014

<u>Cause</u>	<u>Number of Events</u>	<u>Percent</u>
Crushed/run-over by highway vehicle	26	54.2
Crushed/run-over of non-operator by operating construction equipment	8	16.7
Crushed/run-over of operator by operating construction equipment	8	16.7
Electric shock by touching exposed wire with crane/lifting equipment/boom/dump truck	2	4.2
Struck by falling object/projectile	1	2.1
Crushed/run-over by construction equipment during maintenance/modification	1	2.1
Fall from/with platform or catwalk	1	2.1
Crushed/suffocation from trench collapse	1	2.1
Total	48	100.0

Figure 2 compares the top 7 fatality causes with “crushed/run-over by highway vehicle” for highway/road construction. The top 7 fatality causes (identified in Table 1) had 252 events (53.6 percent) of the total 470 events compared with 26 events (54.2 percent) for “crushed/run-over by

highway vehicle.” For highway/road construction fatal events, the top 7 fatality causes (shown in Table 5) had 47 events (97.9 percent) and “crushed/run-over by highway vehicle” had 26 events (54.2 percent) of the 48 fatal events. It should be noted that the top 7 fatal event causes which accounted for over 53.6 percent of the total events also accounted for 70.8 percent of the highway/road work construction fatal events. However, the “crushed/run-over by highway vehicle” cause increased significantly from 6.2 percent overall to over 54.2 percent for highway/road construction.

Figure 2. Highway Construction Fatality Cause Comparison (2014)

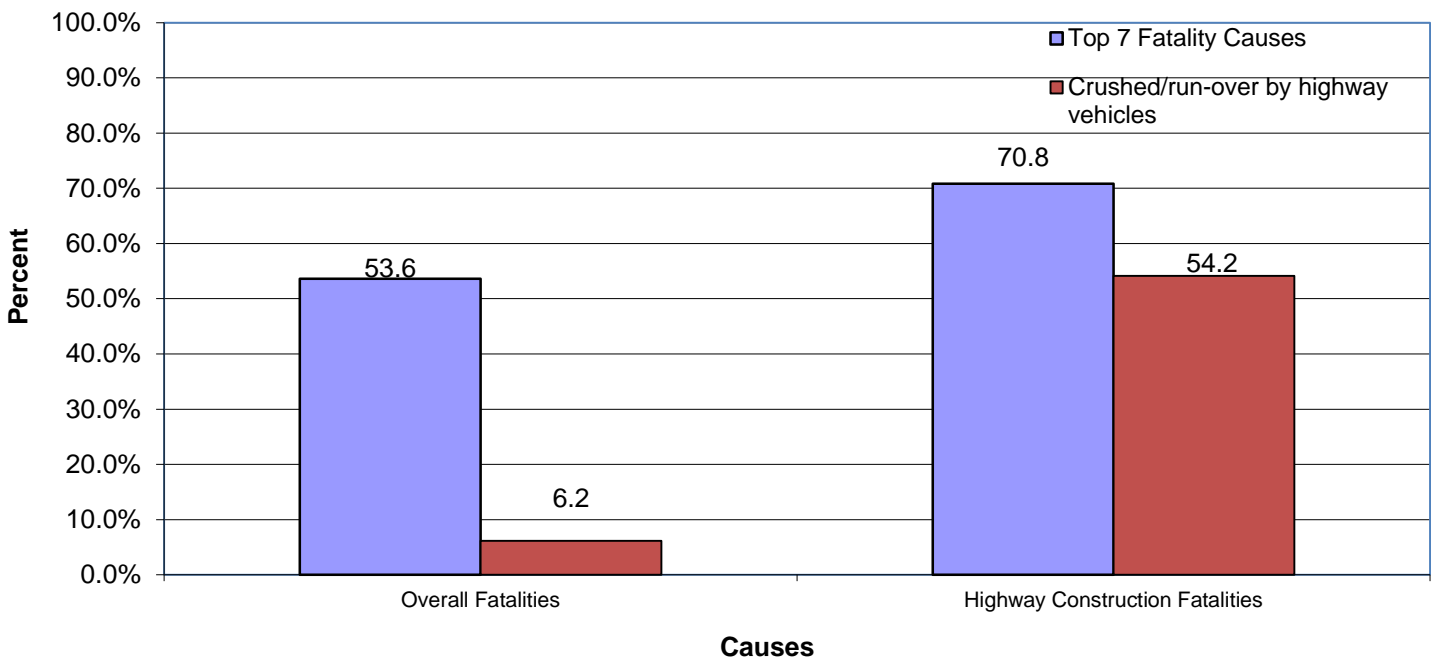

Since traffic on many or most highway/road varies by time of day, and most construction on highway/road occurs during the day, one might expect that most “crushed/run-over by highway vehicles” fatalities would occur during morning and afternoon commuting periods when traffic loads peak. Table 6 shows fatal events caused by victim being crushed/run-over by

highway vehicles by time of day (1-24 hours). For the previous years, 2004 through 2013, a majority of these events occurred from mid-morning through late-afternoon (8-17 hour period) and ranged from 47 percent to 80 percent with a median 60 percent. In 2014, 27 events (56.2 percent) occurred during the 8-17 hour period.

This year, 2014, 16.7 percent of the fatal events occurred in the early morning (0-5 hour period) and 14.6 percent in the late night (20-24 hour period). For the previous years, 2004 to 2013, the late night and early morning periods, fatalities rose from 6.7 percent in 2006 to 40 percent in 2010 and fell back to 5.7 percent in 2013.

It seems clear that road work practices are changing to avoid traffic congestion when possible. This shift should result in a greater proportion of fatalities during early morning and late evening work hours. Whether the change in the proportion of 2014 fatalities occurring during the early morning and late night times represents a change from the trend of prior years remains to be determined. Regardless, it is not possible to calculate fatality rates for these time-of-day periods without knowing the hours worked in each period. More information about conditions which contribute to fatalities in highway/roadway construction would seem to an area worthy of further investigation.

Table 6. Construction Fatalities Caused by “Crushed/Run-Over by Highway Vehicle” by Time of Day, 2014

<u>Time</u>	<u>Frequency</u>	<u>Percent</u>
Early Morning: 24:00 - 5:00	8	16.7
Dawn: 5:00 - 8:00	2	4.2
Mid-Morning: 8:00 - 11:00	10	20.8
Mid-Day: 11:00 - 14:00	14	29.2
Late-Afternoon: 14:00 - 17:00	3	6.3
Evening: 17:00 - 20:00	4	8.3
Late Night: 20:00 - 24:00	<u>7</u>	<u>14.6</u>
Total	48	100.0

Since “crushed/run-over by highway vehicle” was the leading direct cause of fatal events occurring in highway/road construction, it may be helpful in protecting workers engaged in highway/road construction to look for specific situations in which these fatalities occurred. The often brief narratives of highway construction fatalities provided little or no information on speed limits, pavement conditions, visibility, protective barriers, work zone markings or potential impairments of vehicle operators involved in the fatalities. However, it was still possible to identify six sub-categories of “crushed/run-over by highway vehicle”. Table 7 shows these sub-categories and their frequency.

Table 7. Frequency of Sub-Categories of “Crushed/Run-Over by Highway Vehicle”, 2014

<u>Sub-Category</u>	<u>Frequency</u>	<u>Percent</u>
Highway vehicle lost control and entered (by swerving or inadvertently entering) well-identified work zone, striking victim	8	30.8
Highway vehicle struck victim (flagger) signaling traffic at beginning of marked work zone	6	23.1
Highway vehicle struck victim by entering inadequately marked and protected work zone	4	15.4
Highway vehicle struck victim installing signs or traffic signals in unprotected work zone	3	11.5
Highway vehicle struck victim who walked into traffic zone	2	7.7
Highway vehicle struck shadow vehicle protecting moving vehicle from which victim was performing work, crushing victim	1	3.8
Unknown	<u>2</u>	<u>7.7</u>
Total	26	100.0

Sixty-nine percent of the events were in three of the six sub-categories “highway vehicle lost control and entered well identified work zone, striking victim” (8 events), “highway vehicle struck victim (flagger) signaling traffic at the beginning of a marked work zone” (6 events) and highway vehicle struck victim by entering inadequately marked and protected work zone” (4 events). Twenty-seven percent of the events (7 events) occurred in unprotected work zones and might have been avoided by marking the work zones.

Observation

The quality of the descriptions and information about the 2014 fatal events has deteriorated compared to 2013 and earlier years. Previously we have commented about the descriptive statements often not including sufficient detail to clearly identify the root cause of a fatal event; in some cases only a one or two word comment, e.g. “run-over,” “died,” “fell off building.” Inadequate descriptions have become more frequent.

In 2014, the number of missing data elements has increased in some categories and decreased in others. The project value of the construction activity was missing in 41 percent of the fatal events compared to 37 percent in 2013; the construction operation being performed was missing in 17 percent of the fatal events compared to 11 percent in 2013; the end-use type of the construction project was missing in 26 percent of the fatal events compared to 9 percent in 2013; the type of project was missing in 25 percent of fatal events compared to 10 percent in 2013; and the time of day of the fatal events was missing in 2 percent of the fatal events compared to 5 percent in 2013. Two thousand thirteen is the first year NAICS coding was used and 7 percent of these codes were missing compared to no missing SIC codes in 2012. [Again in 2014, 7 percent of the NAICS codes are missing.]

Road work seems to be shifting to times when there is less traffic, generally in the late evening and early morning hours. The hour of a fatal event is especially important in assessing the impact of this change in road work patterns. In 2014 and 2013 all of the event times for road work fatalities were recorded, compared to 2012 where 10 percent were missing.

APPENDIX A

Definitions of Fatality Causes

1. asphyxiation/inhalation of toxic vapor: lack of oxygen and/or inhalation of toxic gas, (excluding asphyxiation resulting from fire/explosion)
2. caught in/struck by stationary equipment: body or clothing caught pulling worker into equipment
3. collapse of structure: building or other structure falling on worker, not including falling ladder, scaffold, aerial lift/ basket, platform, with a structure, trench collapse, or wall (earthen) collapse
4. crushed/run-over of non-operator by operating construction equipment: non-operator run-over or crushed between equipment and ground or another object by an operator controlled piece of construction equipment
5. crushed/run-over/trapped of operator by operating construction equipment: includes rollover and catching of body in equipment or between equipment and ground or other object while operating the equipment*
6. crushed/run-over by construction equipment during maintenance/ modification: includes equipment/parts falling on worker while assembling or disassembling equipment
7. crushed/run-over by highway vehicle: any run-over by non-construction equipment, including trains
8. drown, non-lethal fall: non-lethal falls into water and flooding of container, trenches, etc.
9. electrocution by touching exposed wire/source: body part contacting the wire/source except when installing equipment or using a tool
10. electrocution by equipment contacting wire
 - a. ladder
 - b. scaffold
 - c. crane/lifting equipment/boom/dump truck
 - d. other: contact while handling materials, e.g. gutters, iron rods, painting equipment, etc.
11. electrocution from equipment installation/tool use: includes failure to de-energize equipment, inappropriate energizing, contacting energized part with tool or body, and inadequately grounded tools or exposed tool wires
12. electric shock, other and unknown cause
13. elevator (struck/crushed by elevator or counter-weights)
14. fall from/with ladder: includes collapse/fall of ladder

*Includes fatalities resulting from asphyxiation/fire/explosion/drowning of trapped operators.

15. fall from roof; fall through roof: skylight or other opening
 - a. fall off of roof
 - b. fall through roof other than skylight
 - c. fall through skylight or other opening
16. fall from vehicle (vehicle/construction equipment): falls from vehicle or equipment while in motion or at rest.
17. fall from/with scaffold: includes collapse/fall of scaffold
18. fall from/with bucket (aerial lift/basket): includes collapse/fall of bucket
19. fall from/with structure (other than roof): fall through opening in the side or through the floor (not opening in the floor) and with the structure in a collapse
 - a. fall with collapse of structure
20. fall from/with platform or catwalk (attached to structure: includes collapse/fall of platform)
21. fall through opening (other than roof): falls through stairwells, equipment openings, or other openings in a floor
22. fall, other or unknown
23. fire/explosion/scalding, excluding electrical burns/explosions
24. hyperthermia/hypothermia
25. lifting operations: failure of equipment, inappropriate lifting, and all loading and unloading by crane operations except electrocution. (Includes objects falling and striking victim during lifting operation)
26. struck by falling object/projectile (including tip-over): does not include collapse of structure, trench, earthen wall, or lifting operations
27. trench collapse: includes earthen wall
28. unloading-loading equipment/material (except by crane): includes slipping and tipping over of construction equipment/material while loading and unloading
29. lightning
30. crushed
31. unknown cause or other
 - a. other

APPENDIX B

Figure B1. Comparison of Construction Fatality Events (1995-2013 with 2014)

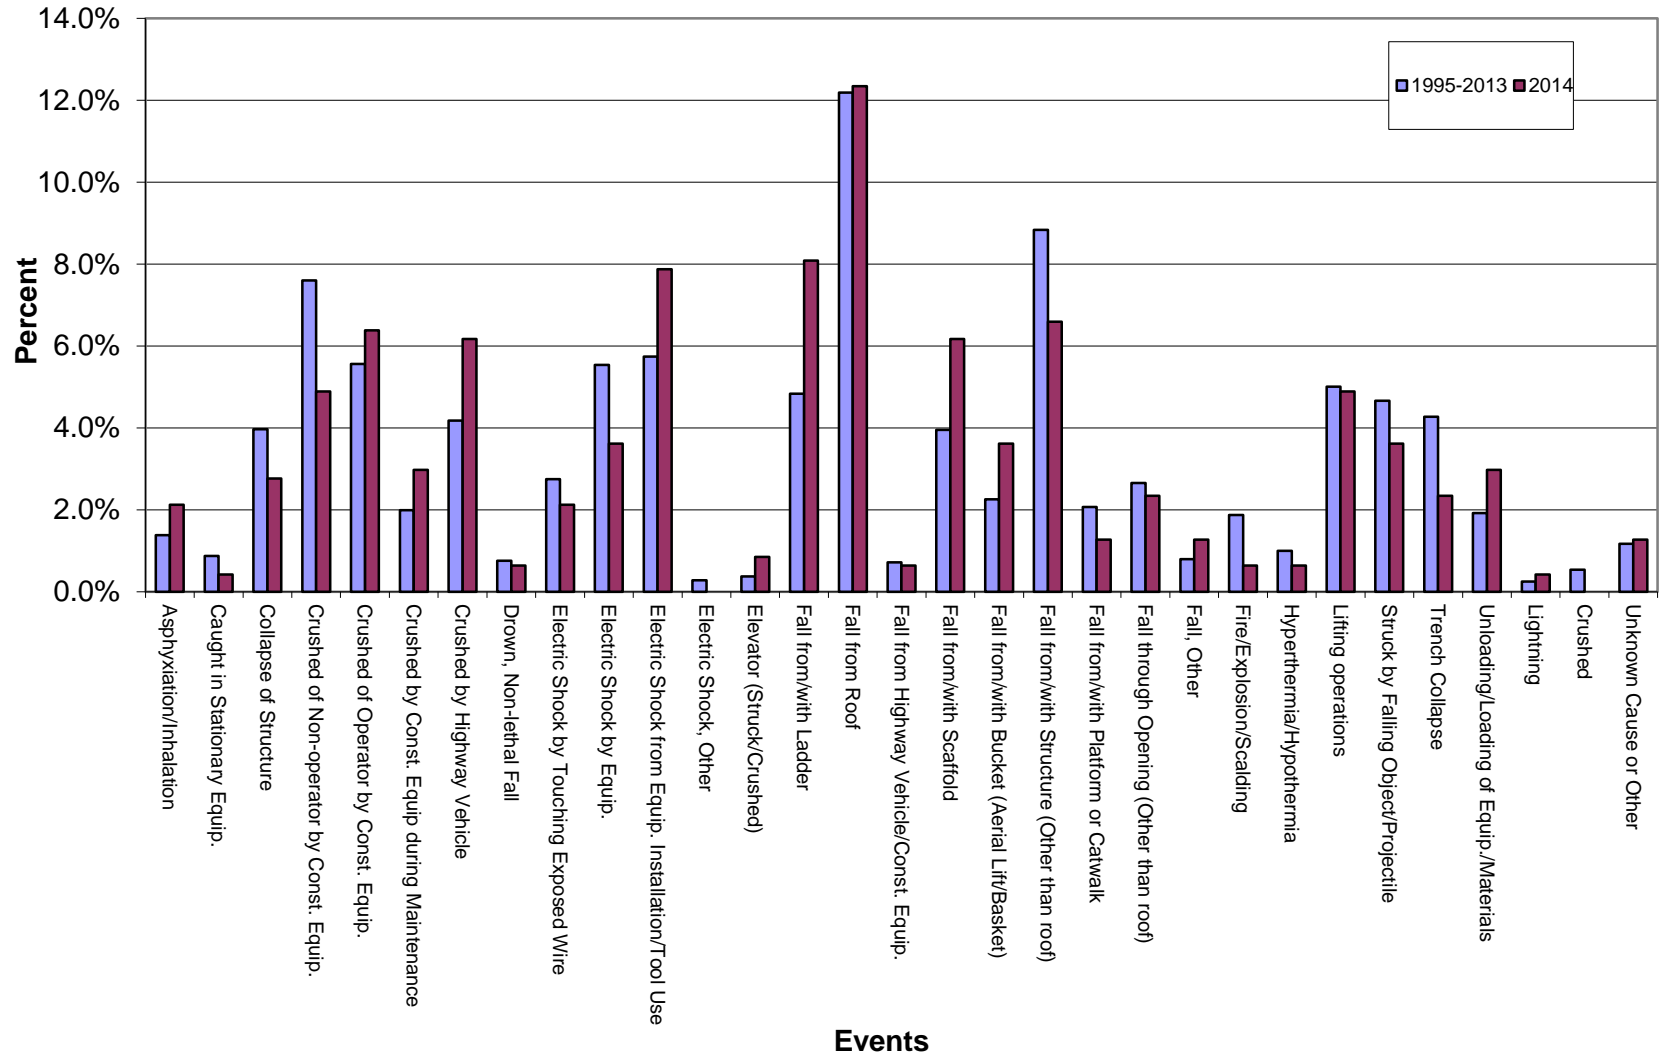


Figure B2. Comparison of Construction Fatality Events (2014)

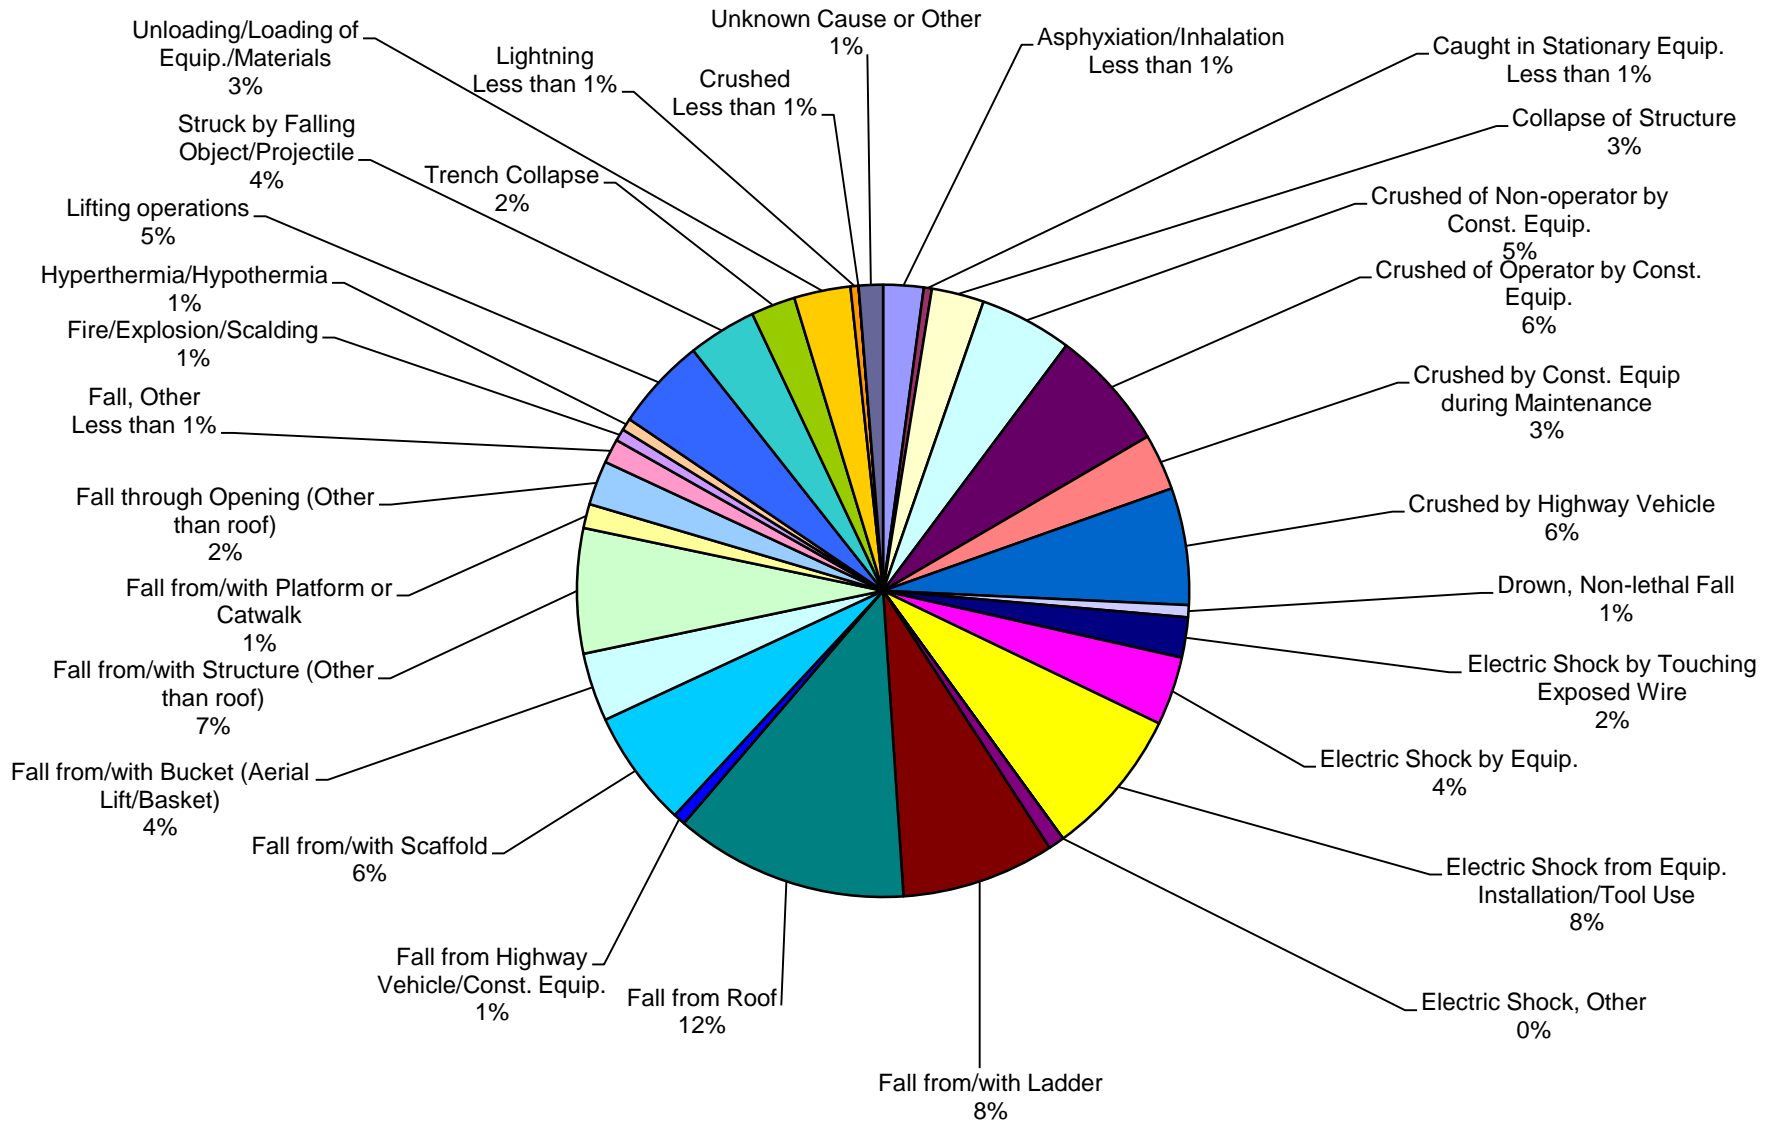


Figure B3. Comparison of Construction Fatality Events (1995-2013)


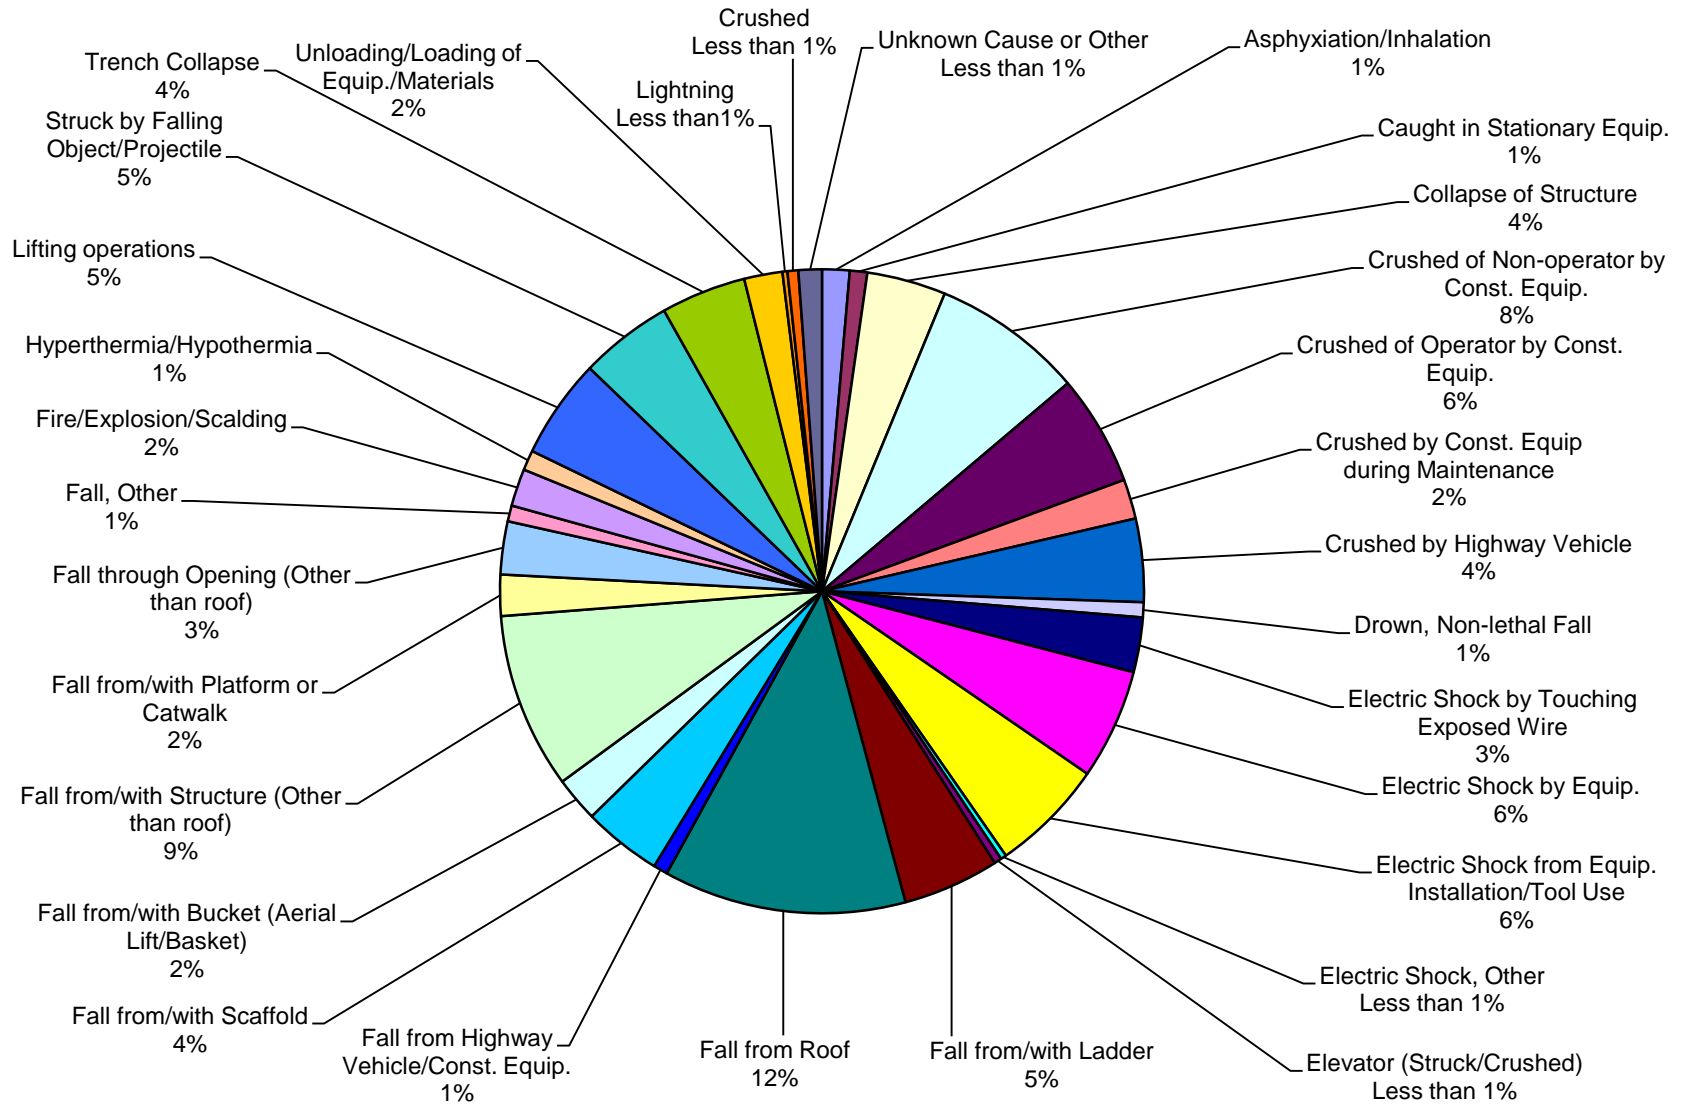


Figure B4. Comparison of Grouped Construction Fatal Events (1995-2013 and 2014)

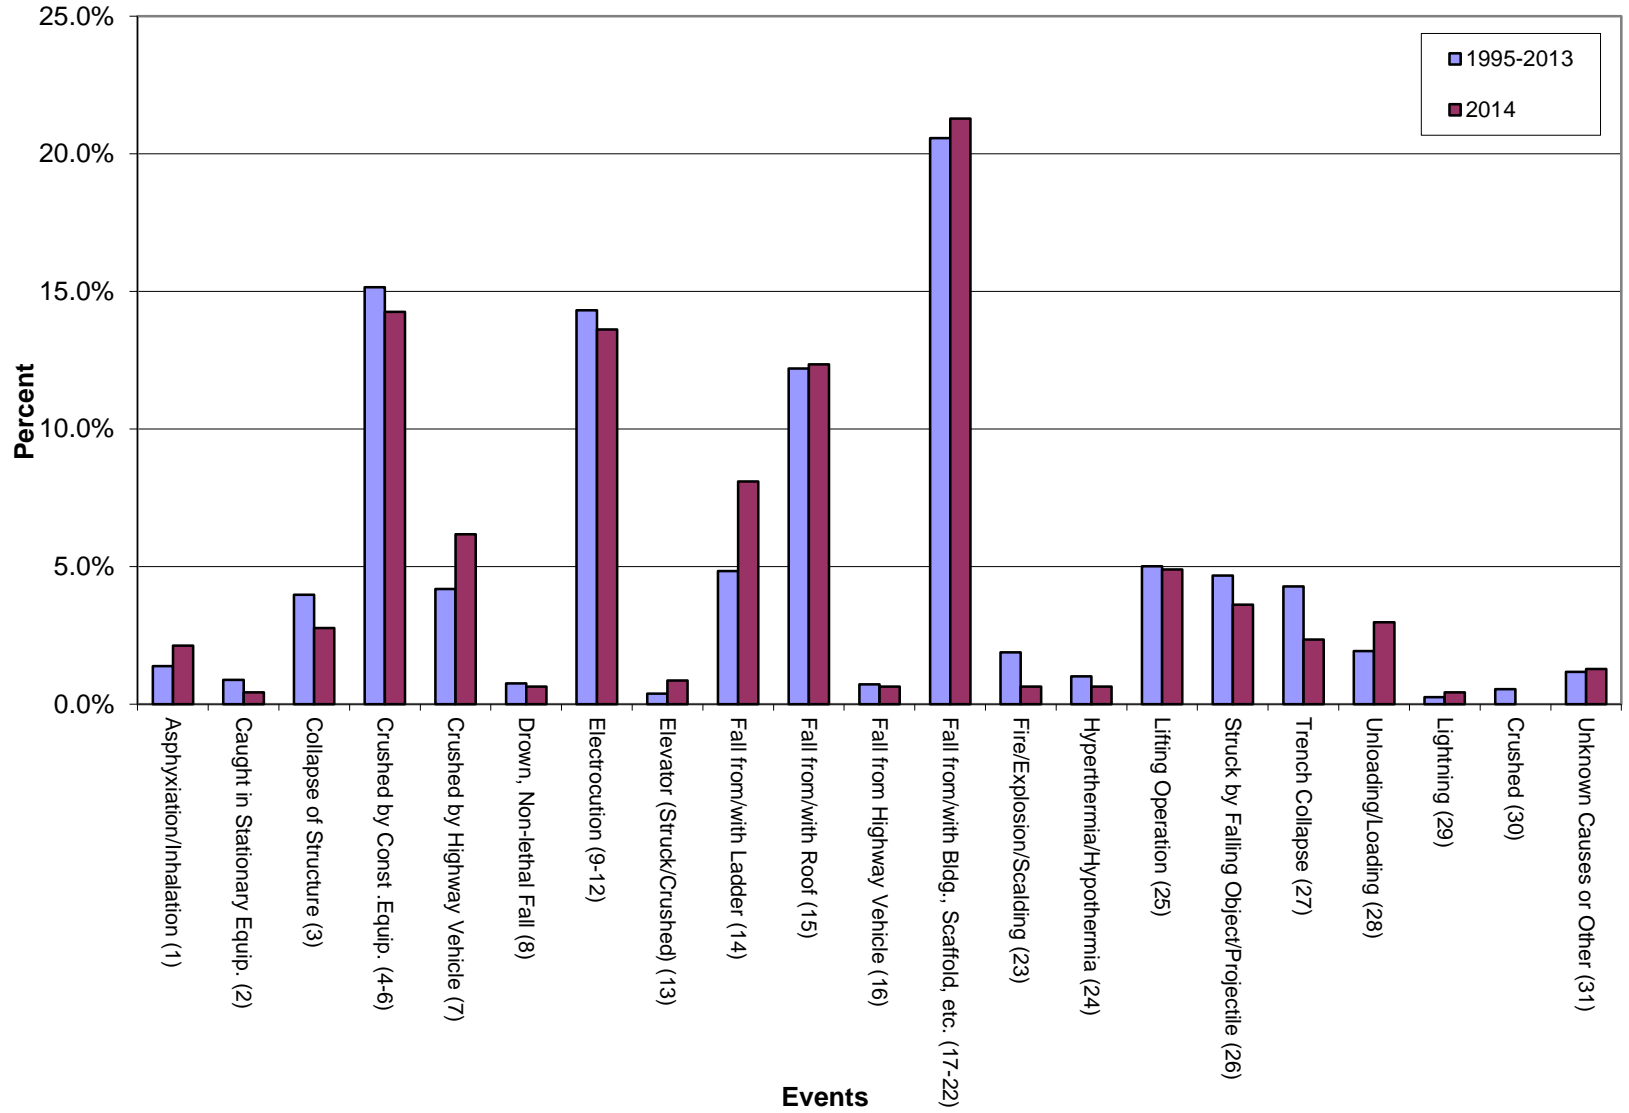

APPENDIX C

Table C1. Construction Fatal Events by End-Use Type, 2014

<u>End Use Type</u>	<u>Description</u>	<u>Number of Events</u>	<u>All Events Percent</u>	<u>Events with Recorded End-Use Percent</u>
1	Single Family or Duplex	72	15.3	15.3
2	Multi-family	30	6.4	21.7
3	Commercial	78	16.6	38.3
4	Manufacturing	14	3.0	41.3
5	Refinery	2	0.4	41.7
6	Power plant	0	0.0	41.7
7	Sewer or Water Plant	9	1.9	43.6
8	Other Building	54	11.5	55.1
9	Highway/Road Work	48	10.2	65.3
10	Bridge	12	2.6	67.9
11	Tower, Tank, Storage Elevator	3	0.6	68.5
12	Shoreline, Dam, Reservoir	1	0.2	68.7
13	Pipeline	5	1.1	69.8
14	Excavation, Landfill	4	0.9	70.6
15	Power line, Transmission Line	6	1.3	71.9
16	Other Heavy Construction	9	1.9	73.8
17	Contractors Yard	2	0.4	74.3
18	Unknown	<u>121</u>	<u>25.7</u>	100.0
Total		470	100.0	

Table C2. Construction Fatal Events by Type of Project, 2014

<u>Project Type</u>	<u>Description</u>	<u>Number of Events</u>	<u>All Events Percent</u>	<u>Events with Recorded Type of Project Percent</u>
A	New Project, Alteration or Rehabilitation	239	50.9	50.9
B	Maintenance, Repair or Demolition	73	15.5	66.4
C	Other	41	8.7	75.1
	Unknown	<u>117</u>	<u>24.9</u>	100.0
Total		470	100.0	

Table C3. Construction Fatal Events by Six-Digit NAICS, 2014

NAICS Code	Description	Number of Events	All Events Percent	Events with Recorded NAICS Percent
236115	New Single-Family Housing Construction	11	2.3%	2.3%
236116	New Multifamily Housing Construction	1	0.2%	2.6%
236118	Residential Remodelers	11	2.3%	4.9%
236210	Land Subdivision	9	1.9%	6.8%
236220	Commercial and Institutional Building Construction	23	4.9%	11.7%
237110	Water and Sewer Line and Related Structures Construction	22	4.7%	16.4%
237120	Oil and Gas Pipeline and Related Structures Construction	3	0.6%	17.0%
237130	Power and Communication Line and Related Structures Construction	7	1.5%	18.5%
237310	Highway, Street and Bridge Construction	50	10.6%	29.1%
237990	Other Heavy and Civil Engineering Construction	15	3.2%	32.3%
238110	Poured Concrete Foundation and Structure Contractors	19	4.0%	36.4%
238120	Structural Steel and Precast Concrete Contractors	12	2.6%	38.9%
238130	Framing Contractors	10	2.1%	41.1%
238140	Masonry Contractors	11	2.3%	43.4%
238150	Glass and Glazing Contractors	2	0.4%	43.8%
238160	Roofing Contractors	68	14.5%	58.3%
238170	Siding Contractors	4	0.9%	59.1%
238190	Other Foundation, Structure and Building Exterior Contractors	3	0.6%	59.8%
238210	Electrical Contractors	45	9.6%	69.4%
238220	Plumbing, Heating and Air-Conditioning Contractors	32	6.8%	76.2%
238290	Other Building Equipment Contractors	9	1.9%	78.1%
238310	Drywall and Insulation Contractors	17	3.6%	81.7%
238320	Painting and Wall Covering Contractors	17	3.6%	85.3%
238340	Tile and Terrazzo Contractors	2	0.4%	85.7%
238350	Finish Carpentry Contractors	2	0.4%	86.2%
238390	Other Building Finishing Contractors	2	0.4%	86.6%
238910	Site Preparation Contractors	29	6.2%	92.8%
238990	All Other Specialty Trade Contractors	33	7.0%	99.8%
	Unknown	<u>1</u>	<u>0.2%</u>	100.0%
Total		470	100.0%	

Table C4. Construction Fatal Events by Project Value, 2014

<u>Project Value Code</u>	<u>Cost</u>	<u>Number of Events</u>	<u>All Events Percent</u>	<u>Events with Recorded Project Value Percent</u>
1	Under \$50,000	101	21.5	21.5
2	\$50,000-\$250,000	49	10.4	31.9
3	\$250,000-\$500,000	30	6.4	38.3
4	\$500,000-\$1,000,000	21	4.5	42.8
5	\$1,000,000-\$5,000,000	45	9.6	52.3
6	\$5,000,000-\$20,000,000	12	2.6	54.9
7	\$20,000,000 and over	18	3.8	58.7
8	Unknown	<u>194</u>	<u>41.3</u>	—
	Total	470	100.0	100.0

Table C5. Construction Fatal Events by Construction Operation, 2014

<u>Code</u>	<u>Description</u>	<u>Number of Fatalities</u>	<u>Percent of All Fatalities</u>	<u>Fatal Events with Recorded Construction Operation Percent</u>
1	Backfilling and compacting	1	0.2	0.2
2	Bituminous concrete placement	1	0.2	0.4
3	Construction of playing fields, tennis courts	1	0.2	0.6
4	Cutting concrete pavement	2	0.4	1.1
5	Demolition	18	3.8	4.9
6	Dredging	2	0.4	5.3
7	Elevator, escalator installation	2	0.4	5.7
8	Emplacing reinforcing steel	1	0.2	6.0
9	Erecting structural steel	7	1.5	7.4
10	Erection of coffer dams, caissons	1	0.2	7.7
11	Excavation	15	3.2	10.9
12	Exterior masonry	13	2.8	13.6
13	Exterior cladding	6	1.3	14.9
14	Exterior carpentry	16	3.4	18.3
15	Exterior painting	24	5.1	23.4
16	Fencing, installing lights, signs, etc.	8	1.7	25.1
18	Forming	3	0.6	25.7
19	Forming for Piers or Pylons	0	0.0	25.7
20	Installing interior walls, ceilings, doors	6	1.3	27.0
21	Installing metal siding	1	0.2	27.2
22	Installing windows and doors, glazing	2	0.4	27.7
23	Installing culverts and incidental drainage	3	0.6	28.3
24	Installing equipment (HVAC and other)	30	6.4	34.7
25	Installing plumbing, lighting fixtures	17	3.6	38.3
26	Installing underground plumbing conduit	3	0.6	38.9
27	Interior Tile Work	1	0.2	39.1
28	Interior masonry	0	0.0	39.1
29	Interior plumbing, ducting, electrical work	18	3.8	43.0
30	Interior carpentry	6	1.3	44.3
31	Interior painting and decorating	8	1.7	46.0
32	Landscaping	1	0.2	46.2
34	Paving	22	4.7	50.9
35	Pile driving	4	0.9	51.7
37	Placing bridge girders and beams	0	0.0	51.7
38	Plastering	0	0.0	51.7
39	Pouring or installing floor decks	2	0.4	52.1
40	Pouring concrete floor at grade	7	1.5	53.6
41	Pouring concrete for piers and pylons	1	0.2	53.8
42	Pouring concrete foundations and walls	1	0.2	54.0
43	Roofing	54	11.5	65.5

Table C5. Construction Fatal Events by Construction Operation, 2014 (continued)

<u>Code</u>	<u>Description</u>	<u>Number of Fatalities</u>	<u>Percent of All Fatalities</u>	<u>Fatal Events with Recorded Construction Operation Percent</u>
44	Seawall Construction, riprap placement	1	0.2	65.7
45	Site clearing and grubbing	10	2.1	67.9
46	Site grading and rock removal	6	1.3	69.1
47	Stripping and curing concrete	3	0.6	69.8
48	Surveying	3	0.6	70.4
50	Temporary work (buildings, facilities)	28	6.0	76.4
51	Traffic protection	8	1.7	78.1
52	Trenching, installing pipe	8	1.7	79.8
53	Waterproofing	0	0.0	79.8
54	Steel Erection of Solid Web-Connecting	1	0.2	80.0
56	Steel Erection of Solid Web-Welding/Burning/Grinding	2	0.4	80.4
62	Welding/Burning/Grinding	1	0.2	80.6
66	Installation of Decking-Initial Laying Deck (Including Layout & Safety)	1	0.2	80.9
67	Installation of Decking-Final Attachment Deck (Welding/Shear Studs/Etc.	2	0.4	81.3
69	Installation of Decking-Hoisting Bundles	2	0.4	81.7
70	Other Activities-Installing Ornamental and Architectural Steel	3	0.6	82.3
71	Other Activities-Post Decking Detail Work	1	0.2	82.6
00	Unknown/Missing	<u>82</u>	<u>17.5</u>	100.0
	Total	470	100.0	
